


PORTRAIT VMS SOLUTION


Low power, energy efficient variable message sign

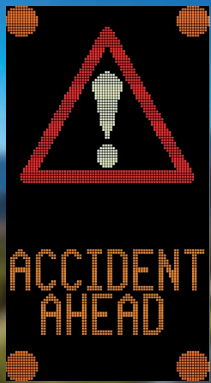

- Small footprint - ideal for narrow side-walks where space is at a premium.
- Eliminates requirements for cabling & trenches - saving money & minimising road user dissatisfaction.
- Lower power consumption, reducing operating costs & lowering carbon footprint.

SPECIFICATIONS

Resolution (HxW)	144 x 80 (16mm pixel pitch)
Display Size	2304 x 1280mm
Max characters	8 lines, 7 characters per line
Average power	Approx 200W
Weight	Approx. 160kg
Housing Dimension (HxW)	2550 x 1450 mm

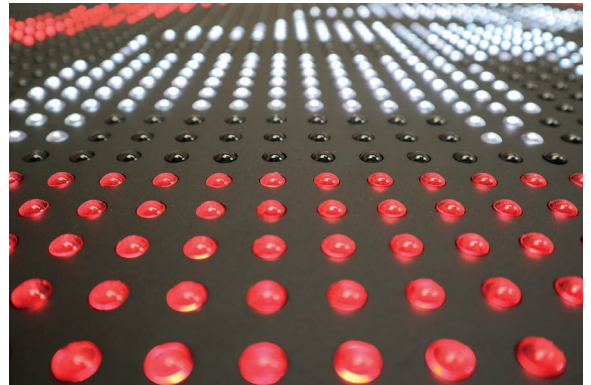

KEY FEATURES

- EN12966 compliant & capable of displaying TSRGD characters & symbols
- Compatible with all standard protocols
- Can be integrated with fuel cell, solar and wind turbine power
- Real-time message updates with our Remote Connect system software
- IP65 rated
- Energy efficient design

